



*Thermatrac*



# *Thermatrac*

electric storage water heater

INSTALL A RHEEM™


# Thermatrac Electric Storage Water Heater

Thermatrac electric storage water heaters are manufactured to the highest quality standards:

- Exclusive vitreous enamel coating to resist corrosion
- Deep drawn tank construction 2mm thickness with single circumferential weld, reduces over 67% of tank leakage
- Magnesium anode to counter aggressive water
- CFC free polyurethane thick with epoxy coated jacket
- Pressure relief valve with built in check valve
- Adjustable immersion thermostat with thermal cut out (max. temperature setting 75°C)
- Water connections enameled for corrosion protection
- Power ON and heating indicating light
- Incoloy 840 immersion heating element
- Modern design with various tank capacities and built in installation brackets for wall mounting
- Maximum working pressure 8 Bars
- Complied and tested to IEC 60335-2-21, SS146: TÜV SÜD PSB Standard

## Technical Specifications

Model Number		RSX-10	RSX-15	RSX-30
Rated Storage	L	10	15	30
rated Power	kW	1.64kW@230V		2.73kW@230V
Rated Electric Current	A	7.1A@230V		11.86A@230V
Length L	mm	345	385	455
Height H	mm	345	385	455
Width W	mm	277	307	377
Voltage		230V/1Ph/50Hz		
Max.Temp.Setting	°C	75		
Pressure Relidf valve set	kPa	800		
Pipe Sizes for inlet and outlet		1/2"/15BSP		
Operating Weight (approx.)	kg	17.8	23.4	42.4
Shipping Weight (approx.)	kg	9.2	10	14.7

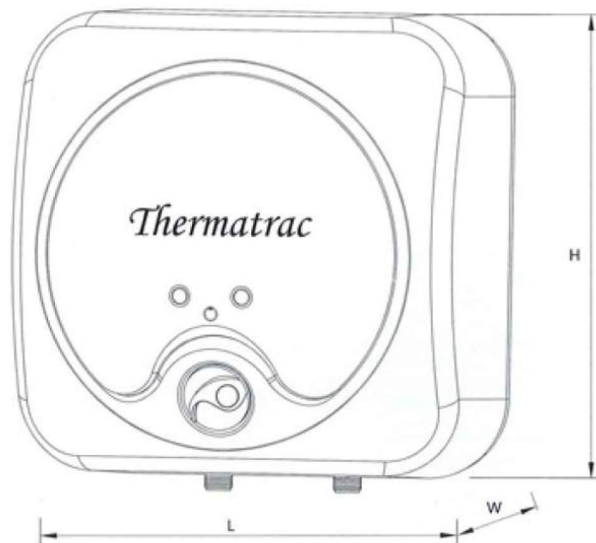

Distributor:

**DAIREN ENGINEERING**

Block 3007, Ubi Road 1, #06-432, Singapore 408701. Tel: 67413323 Fax: 67413038  
 Website: www.dairen.com.sg e-mail: dairen@dairen.com.sg

Service Center / Showroom:

Block 24, Sin Ming Lane, #02-91, Midview City, Singapore 573970. Tel: 67593323 Fax: 65703313